
25 1/8" Small Ballast Pot Canopy 3 1/8" |< leads set screw 1/2 N.P.T. husk 7 1/4" leads 1/2" I.P.S. swivel 1/2 N.P.T. set screw backplate Mean Well LPV-20-24 ballast knurl knob Class 2 Power Supply bolt - 32 1/8" lead

- 50,000 hour life
- ° Average savings is \$39.42 per year as compared to a 75 Watt incandescent

11"

- Savings of \$518.16 for the life of the fixture
- Lumen output is equal to a 75 Watt bulb.

Unless Otherwise Specified:		Name	Date	Duine alita Mfar Carro				
Dimensions in Inches Tolerances: Fractional ± Angular: Mach ± Bend ± Two Place Decimal ± Three Place Decimal ±	Drawn	T.A.R.	02/07/12	Primelite Mfg. Corp.				
	Checked			23/14-853 LED 24 Watt 1000 Lumens @ 3000K 1250 Lumens @ 4000K				
	ENG Appr.							
	MFR Appr.							
	QA							
	Comments	Comments			24 Volt Output			
Construction: All Aluminum	CAD Generated Drawing			Size	Drawing	g No.		Rev
Pipe Size: 1/2"	Do Not Manually	Do Not Manually Update		Α	A 0001			Α
	\dashv			Scale		CAD File	Sheet	1 of '

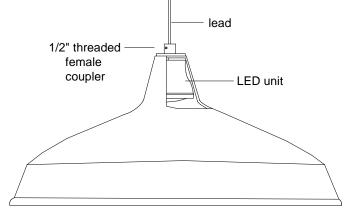

23/14A Shade