
## - 25 1/8" -Small Ballast Pot Canopy 3 1/8" leads set screw 1/2 N.P.T. husk 7 1/4" leads 1/2" I.P.S. swivel 1/2 N.P.T. set screw backplate 10" Mean Well LPV-20-24 ballast Class 2 Power Supply knurl knob bolt - 33 1/8" -

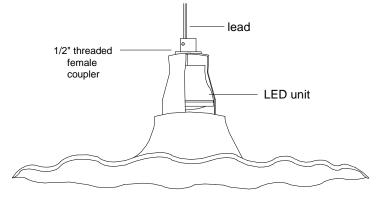

30/16A Shade

- 50,000 hour life
- ° Average savings is \$39.42 per year as compared to a 75 Watt incandescent
- $\circ$  Savings of \$ 518.16 for the life of the fixture
- Lumen output is equal to a 75 Watt bulb.

Unless Otherwise Specified:		Name	Date	Drimolito Mfg. Corp			
Dimensions in Inches Tolerances: Fractional ± Angular: Mach ± Bend ± Two Place Decimal ± Three Place Decimal ±	Drawn	T.A.R.	02/07/12	Primelite Mfg. Corp.  30/16-853 LED 24 Watt 1000 Lumens @ 3000K 1250 Lumens @ 4000K			
	Checked						
	ENG Appr.						
	MFR Appr.						
	QA						
	Comments			24 Volt Output			
Construction: All Aluminum		CAD Generated Drawing		Size Drawing No.			Rev
Pipe Size: 1/2"	Do Not Manually Update			Α	0001		Α
				Scale	CAD File	Sheet	1 of 1