



# Primelite

IN THE U.S.A. MANUFACTURING CORP

**IES ROAD REPORT**  
**PHOTOMETRIC FILENAME : 5796.IES**

## DESCRIPTIVE INFORMATION (From Photometric File)

IESNA:LM-63-2002  
[TEST] 5796 LED  
[TESTDATE] 18-Sep-2017 08:24:24  
[TESTLAB] Radiant Vision Systems ProSource  
[ISSUEDATE] 9/18/2017 9:15:22 AM  
[MANUFAC] PRIMELITE MANUFACTURING  
[LAMP] LED Module  
[\_TOTALLUMINAIRELUMENS] 10170.4  
[\_NUMBEROFRAYS]10000000  
[DRIVER TYPE] (2) D10CC55UNVTZ-C  
[BOARD TYPE] (8) UNIVERSAL "F"  
[COLOR TEMP] 4,127  
[LUMEN/WATT] 107 LM/WT  
[CRI] 85.1  
[OTHER] Absolute Photometry measurement  
[NOTE] Some data may be scaled based on tests of similar (but not identical) luminaires and wattages.



## CHARACTERISTICS

IES Classification	Type II
Longitudinal Classification	Very Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	10176
Downward Total Efficiency	N.A. (absolute)
Total Luminaire Efficiency	N.A. (absolute)
Luminaire Efficacy Rating (LER)	108
Total Luminaire Watts	94.5
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Maximum Candela	4115.86
Maximum Candela Angle	20H 3V
Maximum Candela (<90 Degrees Vertical)	4115.86
Maximum Candela Angle (<90 Degrees Vertical)	20H 3V
Maximum Candela At 90 Degrees Vertical	14.95 (0.1% Luminaire Lumens)
Maximum Candela from 80 to <90 Degrees Vertical	286.48 (2.8% Luminaire Lumens)
Cutoff Classification (deprecated)	N.A. (absolute)

**IES ROAD REPORT**  
**PHOTOMETRIC FILENAME : 5796.IES**

**LUMINAIRE CLASSIFICATION SYSTEM (LCS)**

	Lumens	% Lamp	% Luminaire
FL - Front-Low (0-30)	1615.6	N.A.	15.9
FM - Front-Medium (30-60)	2971.2	N.A.	29.2
FH - Front-High (60-80)	549.2	N.A.	5.4
FVH - Front-Very High (80-90)	10.5	N.A.	0.1
BL - Back-Low (0-30)	1604.4	N.A.	15.8
BM - Back-Medium (30-60)	2912.9	N.A.	28.6
BH - Back-High (60-80)	504.8	N.A.	5.0
BVH - Back-Very High (80-90)	6.4	N.A.	0.1
UL - Uplight-Low (90-100)	1.0	N.A.	0.0
UH - Uplight-High (100-180)	< 0.05	N.A.	0.0
Total	10176.0	N.A.	100.0
BUG Rating	B3-U1-G2		

**IES ROAD REPORT**  
**PHOTOMETRIC FILENAME : 5796.IES**

**CANDELA TABULATION**

Vert. Angles	Horizontal Angles									
	<u>0</u>	<u>10</u>	<u>20</u>	<u>30</u>	<u>40</u>	<u>50</u>	<u>60</u>	<u>70</u>	<u>80</u>	<u>90</u>
<b>0</b>	4104.88	4104.88	4104.88	4104.88	4104.88	4104.88	4104.88	4104.88	4104.88	4104.88
<b>3</b>	4113.20	4115.48	4115.86	4114.35	4112.08	4107.96	4103.71	4099.22	4094.78	4091.36
<b>6</b>	4101.14	4101.26	4100.63	4094.86	4087.11	4079.44	4072.48	4062.36	4052.59	4041.59
<b>9</b>	4053.55	4049.18	4043.63	4029.68	4025.58	4026.72	4027.09	4020.26	4006.79	3990.06
<b>12</b>	3991.99	3986.77	3971.21	3951.69	3951.00	3959.96	3977.07	3978.82	3965.62	3947.75
<b>15</b>	3939.28	3941.14	3929.94	3889.46	3860.53	3879.33	3912.70	3932.26	3927.25	3919.30
<b>18</b>	3886.42	3900.61	3897.45	3853.55	3808.29	3823.07	3865.79	3890.45	3901.90	3909.23
<b>21</b>	3819.81	3818.22	3830.76	3817.47	3790.97	3816.22	3861.25	3879.67	3894.47	3910.96
<b>24</b>	3739.63	3706.79	3727.60	3755.64	3767.21	3816.10	3871.91	3875.14	3869.70	3876.57
<b>27</b>	3651.87	3606.15	3615.95	3685.92	3716.38	3781.20	3834.38	3814.08	3782.69	3773.38
<b>30</b>	3571.14	3512.58	3516.70	3618.66	3648.88	3703.83	3716.49	3706.84	3681.42	3667.57
<b>33</b>	3508.71	3408.94	3429.31	3570.21	3580.16	3604.99	3575.25	3623.45	3615.82	3610.09
<b>36</b>	3453.43	3299.37	3365.75	3494.66	3466.67	3494.67	3486.05	3569.60	3499.49	3494.01
<b>39</b>	3381.72	3205.51	3304.95	3333.51	3316.78	3368.32	3387.80	3372.93	3203.97	3213.81
<b>42</b>	3244.31	3130.55	3219.35	3174.06	3196.45	3202.10	3159.08	2982.63	2762.76	2826.18
<b>45</b>	3017.48	3061.57	3092.66	2993.79	3053.76	2942.66	2750.62	2433.98	2330.54	2422.81
<b>48</b>	2801.05	2928.61	2932.78	2794.22	2811.05	2557.39	2301.97	2093.59	1993.30	2066.13
<b>51</b>	2677.71	2699.05	2728.67	2599.82	2435.92	2128.14	1936.73	1825.23	1770.85	1791.39
<b>54</b>	2542.64	2443.92	2514.07	2402.56	1986.48	1750.04	1619.76	1566.94	1569.99	1559.48
<b>57</b>	2309.20	2258.54	2233.39	2009.88	1616.63	1488.91	1362.93	1290.16	1332.42	1288.48
<b>60</b>	1980.05	2075.90	1956.76	1579.00	1349.57	1260.24	1094.23	1020.75	1024.30	1002.22
<b>63</b>	1708.42	1822.57	1746.71	1230.36	1108.66	1024.74	796.30	769.86	785.09	703.86
<b>66</b>	1469.43	1500.01	1349.21	960.84	848.46	686.45	471.89	415.65	276.58	239.97
<b>69</b>	1247.75	1180.31	911.76	727.98	545.72	332.35	206.80	147.41	95.80	109.55
<b>72</b>	979.03	859.92	587.56	450.12	270.99	134.44	91.55	61.43	59.64	62.36
<b>75</b>	688.23	550.02	338.60	244.87	86.07	49.15	38.19	39.77	28.71	35.28
<b>78</b>	411.20	284.39	170.85	69.95	26.26	24.25	13.87	15.39	16.48	16.53
<b>81</b>	224.12	124.67	70.32	26.36	13.64	17.96	17.87	16.10	14.48	17.99
<b>84</b>	78.17	38.21	8.99	6.61	6.78	21.20	23.62	14.12	16.64	22.14
<b>87</b>	12.74	2.95	0.80	3.79	11.64	28.10	20.14	13.89	13.62	16.98
<b>90</b>	3.30	0.25	0.00	1.88	9.27	14.87	13.61	11.21	10.05	12.47
<b>93</b>	0.00	0.00	0.00	0.11	1.02	2.88	4.67	5.42	3.78	6.88
<b>96</b>	0.00	0.00	0.00	0.03	0.13	0.13	0.27	0.42	0.25	0.37
<b>99</b>	0.00	0.00	0.01	0.01	0.03	0.04	0.04	0.05	0.03	0.03
<b>102</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>105</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>108</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>111</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>114</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>117</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>120</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>123</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>126</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>129</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>132</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>135</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>138</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>141</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>144</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>147</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>150</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>153</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>156</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

**IES ROAD REPORT**  
**PHOTOMETRIC FILENAME : 5796.IES**

**CANDELA TABULATION - (Cont.)**

159	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
162	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
168	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
171	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
174	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
177	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

**Vert. Horizontal Angles**  
**Angles**

	<u>100</u>	<u>110</u>	<u>120</u>	<u>130</u>	<u>140</u>	<u>150</u>	<u>160</u>	<u>170</u>	<u>180</u>	<u>190</u>
0	4104.88	4104.88	4104.88	4104.88	4104.88	4104.88	4104.88	4104.88	4104.88	4104.88
3	4087.52	4085.19	4083.80	4083.43	4085.66	4089.78	4091.24	4094.28	4095.43	4094.55
6	4030.76	4024.17	4021.14	4021.84	4031.65	4045.96	4062.37	4075.38	4084.30	4085.03
9	3974.56	3960.91	3952.18	3953.16	3966.76	3994.46	4027.11	4055.21	4067.32	4058.68
12	3931.71	3918.14	3909.18	3910.84	3925.77	3950.89	3993.68	4033.21	4046.14	4015.39
15	3908.97	3892.99	3874.91	3868.20	3869.14	3889.05	3939.09	3996.54	4020.84	3971.04
18	3902.54	3875.23	3833.14	3804.73	3781.47	3791.19	3841.83	3937.42	3979.38	3907.77
21	3900.02	3868.72	3808.20	3753.60	3710.49	3687.12	3730.04	3838.90	3913.95	3741.77
24	3864.47	3864.73	3823.69	3747.30	3689.05	3619.46	3614.75	3726.68	3846.09	3646.05
27	3762.86	3798.53	3801.34	3731.93	3700.76	3606.04	3522.63	3555.89	3794.46	3619.61
30	3660.49	3670.67	3669.11	3642.07	3662.49	3594.91	3441.25	3467.46	3738.55	3504.61
33	3622.60	3558.15	3504.04	3514.01	3552.93	3553.93	3384.80	3315.42	3655.89	3382.00
36	3541.86	3497.62	3416.71	3403.82	3388.16	3446.72	3377.73	3189.74	3556.27	3232.65
39	3275.47	3334.24	3327.89	3299.28	3241.47	3260.27	3326.95	3088.14	3449.69	3087.14
42	2854.35	2932.81	3091.93	3135.90	3115.82	3111.68	3163.18	2975.87	3314.89	2925.08
45	2413.73	2453.96	2702.21	2862.76	2896.53	2972.43	2958.87	2830.67	3133.36	2736.28
48	2033.56	2079.77	2293.71	2482.62	2598.82	2798.69	2705.31	2666.88	2928.36	2535.30
51	1752.67	1792.69	1937.04	2076.40	2299.60	2568.44	2433.11	2515.91	2725.07	2368.57
54	1527.10	1571.77	1637.19	1719.52	1965.81	2258.70	2242.26	2383.25	2514.27	2201.65
57	1296.76	1346.87	1424.98	1456.85	1620.80	1937.29	2038.60	2198.03	2279.98	2021.13
60	1006.02	1054.01	1197.93	1219.81	1305.60	1567.27	1760.56	1955.00	2014.30	1812.35
63	692.13	708.82	835.14	930.03	1068.33	1209.89	1439.61	1671.46	1716.82	1572.55
66	256.63	345.98	480.33	618.86	846.58	914.36	1047.43	1343.20	1407.87	1288.00
69	120.55	148.44	206.37	324.12	537.81	631.93	711.93	1007.78	1107.85	993.41
72	62.78	62.56	92.19	127.51	263.24	396.13	473.91	690.95	816.90	708.61
75	29.29	29.12	34.72	53.72	76.52	179.34	266.44	412.94	536.98	426.18
78	17.87	14.43	16.00	19.42	22.39	48.52	111.68	185.10	297.64	212.99
81	13.30	15.31	15.09	14.15	8.82	11.88	35.01	60.30	114.37	61.88
84	13.10	14.70	18.90	23.01	7.84	5.10	4.09	12.52	24.82	10.13
87	10.79	14.92	26.09	20.82	12.40	1.66	0.10	0.75	1.48	0.19
90	10.90	9.61	14.95	8.84	3.05	0.35	0.07	0.00	6.09	0.00
93	5.38	3.95	3.93	2.73	1.36	0.54	0.02	0.01	0.61	0.00
96	0.46	0.38	0.38	0.17	0.13	0.04	0.01	0.00	0.05	0.00
99	0.10	0.03	0.01	0.01	0.00	0.01	0.00	0.00	0.00	0.00
102	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
108	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
111	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
114	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
117	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
123	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
126	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
129	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

**IES ROAD REPORT**  
**PHOTOMETRIC FILENAME : 5796.IES**

**CANDELA TABULATION - (Cont.)**

132	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
138	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
141	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
144	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
147	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
153	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
156	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
159	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
162	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
168	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
171	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
174	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
177	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

**Vert. Angles**      **Horizontal Angles**

	<u>200</u>	<u>210</u>	<u>220</u>	<u>230</u>	<u>240</u>	<u>250</u>	<u>260</u>	<u>270</u>	<u>280</u>	<u>290</u>
0	4104.88	4104.88	4104.88	4104.88	4104.88	4104.88	4104.88	4104.88	4104.88	4104.88
3	4091.77	4087.17	4081.91	4074.49	4068.44	4063.33	4059.66	4059.40	4059.83	4063.90
6	4080.56	4069.76	4056.60	4043.22	4029.73	4015.80	4006.43	4000.86	4001.42	4007.69
9	4040.83	4018.78	4007.32	4001.78	3995.88	3989.41	3982.82	3976.31	3971.53	3969.66
12	3967.75	3934.71	3937.04	3944.63	3956.29	3966.00	3971.17	3968.80	3957.87	3943.16
15	3896.42	3848.75	3850.68	3880.36	3906.82	3932.62	3945.69	3949.43	3942.74	3925.59
18	3815.03	3769.38	3777.26	3820.58	3856.94	3887.94	3903.06	3908.58	3915.07	3906.41
21	3720.36	3693.58	3733.33	3781.85	3814.06	3832.04	3835.39	3846.06	3853.81	3859.95
24	3651.06	3634.43	3717.72	3762.19	3780.36	3773.18	3765.37	3779.53	3775.11	3789.21
27	3543.21	3617.55	3705.59	3709.11	3722.36	3716.62	3717.55	3719.18	3710.28	3710.64
30	3475.97	3596.57	3628.10	3580.19	3598.66	3623.53	3643.50	3628.25	3634.13	3608.15
33	3421.41	3532.20	3494.96	3438.61	3453.03	3478.58	3451.70	3469.76	3497.20	3479.31
36	3341.50	3382.45	3323.55	3320.90	3343.00	3329.28	3246.45	3252.03	3293.37	3345.36
39	3214.71	3155.90	3162.05	3196.88	3204.06	3134.45	3035.67	2991.60	3068.37	3139.64
42	3085.14	3007.51	3007.38	3019.93	2953.24	2785.32	2768.60	2692.31	2690.95	2793.66
45	2895.43	2902.96	2796.24	2782.46	2569.85	2372.41	2375.04	2360.15	2265.09	2416.32
48	2644.44	2768.79	2557.28	2484.75	2164.05	2016.10	1955.69	2022.84	1977.15	2090.20
51	2362.03	2545.68	2302.43	2124.01	1807.23	1714.81	1636.67	1699.00	1707.63	1787.88
54	2146.44	2214.40	1935.55	1724.63	1486.65	1434.10	1358.03	1407.70	1442.61	1473.31
57	1921.04	1917.04	1579.46	1386.75	1233.53	1229.58	1124.46	1095.69	1172.27	1254.36
60	1706.34	1624.43	1268.66	1111.34	990.04	934.68	789.17	799.79	831.82	885.97
63	1469.63	1293.03	1012.78	836.37	697.76	576.91	428.41	395.65	426.63	519.02
66	1122.62	928.01	762.09	541.93	311.32	225.02	172.46	177.46	182.23	220.90
69	772.88	589.99	448.59	229.14	125.41	113.84	96.36	95.07	98.64	112.71
72	498.55	345.70	173.72	77.51	57.30	69.41	47.16	54.65	56.62	68.99
75	271.89	148.69	54.22	37.51	29.57	27.11	20.80	20.55	22.97	25.48
78	97.19	37.31	28.24	15.22	8.39	9.36	8.33	5.50	4.45	11.56
81	29.41	11.73	13.62	8.19	6.08	6.09	2.93	2.11	2.69	6.41
84	3.41	4.80	3.94	1.81	3.00	3.67	3.10	2.94	2.84	3.72
87	0.10	0.23	1.05	0.39	0.36	0.80	2.85	1.08	1.88	0.35
90	0.00	0.00	0.00	0.00	0.00	0.08	1.59	0.00	0.00	0.00
93	0.00	0.00	0.00	0.03	0.00	0.04	0.65	0.00	0.47	0.01
96	0.00	0.01	0.01	0.01	0.00	0.02	0.11	0.00	0.04	0.01
99	0.01	0.00	0.02	0.00	0.01	0.00	0.04	0.00	0.00	0.00
102	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

**IES ROAD REPORT**  
**PHOTOMETRIC FILENAME : 5796.IES**

**CANDELA TABULATION - (Cont.)**

105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
108	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
111	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
114	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
117	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
123	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
126	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
129	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
132	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
138	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
141	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
144	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
147	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
153	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
156	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
159	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
162	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
168	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
171	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
174	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
177	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

**Vert. Horizontal Angles**  
**Angles**


	<u>300</u>	<u>310</u>	<u>320</u>	<u>330</u>	<u>340</u>	<u>350</u>	<u>360</u>
0	4104.88	4104.88	4104.88	4104.88	4104.88	4104.88	4104.88
3	4069.84	4077.36	4087.21	4094.71	4103.20	4109.10	4113.20
6	4020.38	4034.78	4051.25	4068.68	4084.71	4094.15	4101.14
9	3973.59	3984.21	3996.87	4012.42	4032.16	4043.90	4053.55
12	3934.09	3936.01	3944.43	3950.46	3965.37	3981.09	3991.99
15	3905.56	3899.58	3903.33	3913.35	3926.82	3932.75	3939.28
18	3882.16	3871.03	3878.43	3891.62	3898.99	3895.90	3886.42
21	3845.56	3835.73	3843.78	3846.22	3844.48	3837.50	3819.81
24	3800.86	3795.46	3787.21	3749.66	3750.23	3755.26	3739.63
27	3739.89	3740.89	3720.88	3664.69	3649.17	3664.59	3651.87
30	3630.87	3655.92	3647.36	3605.36	3576.42	3580.47	3571.14
33	3497.36	3540.97	3556.92	3543.20	3508.20	3510.26	3508.71
36	3361.45	3376.47	3397.65	3427.40	3401.47	3411.15	3453.43
39	3194.98	3175.42	3187.45	3242.80	3259.58	3245.46	3381.72
42	2982.83	3006.36	3021.55	3092.58	3092.14	3061.76	3244.31
45	2679.22	2847.43	2874.30	2928.41	2922.73	2925.53	3017.48
48	2304.48	2561.69	2656.55	2721.43	2773.82	2788.81	2801.05
51	1919.09	2131.99	2319.55	2502.21	2583.97	2604.26	2677.71
54	1543.22	1693.53	1925.86	2253.44	2370.00	2389.84	2542.64
57	1271.15	1373.21	1597.79	2032.84	2091.26	2168.32	2309.20
60	1019.51	1160.24	1332.67	1640.11	1833.20	1904.15	1980.05
63	732.63	920.75	1064.74	1254.48	1611.14	1607.19	1708.42
66	348.85	612.23	780.75	912.98	1279.64	1304.26	1469.43
69	132.91	253.10	481.57	597.98	925.51	1034.94	1247.75
72	71.91	85.28	222.43	375.07	614.88	792.35	979.03
75	35.08	47.69	59.13	191.93	344.92	563.76	688.23

**IES ROAD REPORT**  
**PHOTOMETRIC FILENAME : 5796.IES**

**CANDELA TABULATION - (Cont.)**

<b>78</b>	12.36	24.21	27.41	54.30	154.02	300.93	411.20
<b>81</b>	8.47	12.31	10.75	21.86	56.51	131.36	224.12
<b>84</b>	3.71	2.53	4.80	6.56	8.54	34.36	78.17
<b>87</b>	0.77	0.04	1.32	1.03	1.08	1.61	12.74
<b>90</b>	0.00	0.00	0.54	0.00	0.00	0.00	3.30
<b>93</b>	0.00	0.01	0.00	0.00	0.00	0.00	0.00
<b>96</b>	0.00	0.01	0.02	0.01	0.00	0.00	0.00
<b>99</b>	0.01	0.01	0.04	0.01	0.00	0.00	0.00
<b>102</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>105</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>108</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>111</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>114</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>117</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>120</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>123</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>126</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>129</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>132</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>135</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>138</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>141</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>144</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>147</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>150</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>153</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>156</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>159</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>162</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>165</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>168</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>171</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>174</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>177</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>180</b>	0.00	0.00	0.00	0.00	0.00	0.00	0.00

**COEFFICIENTS OF UTILIZATION**

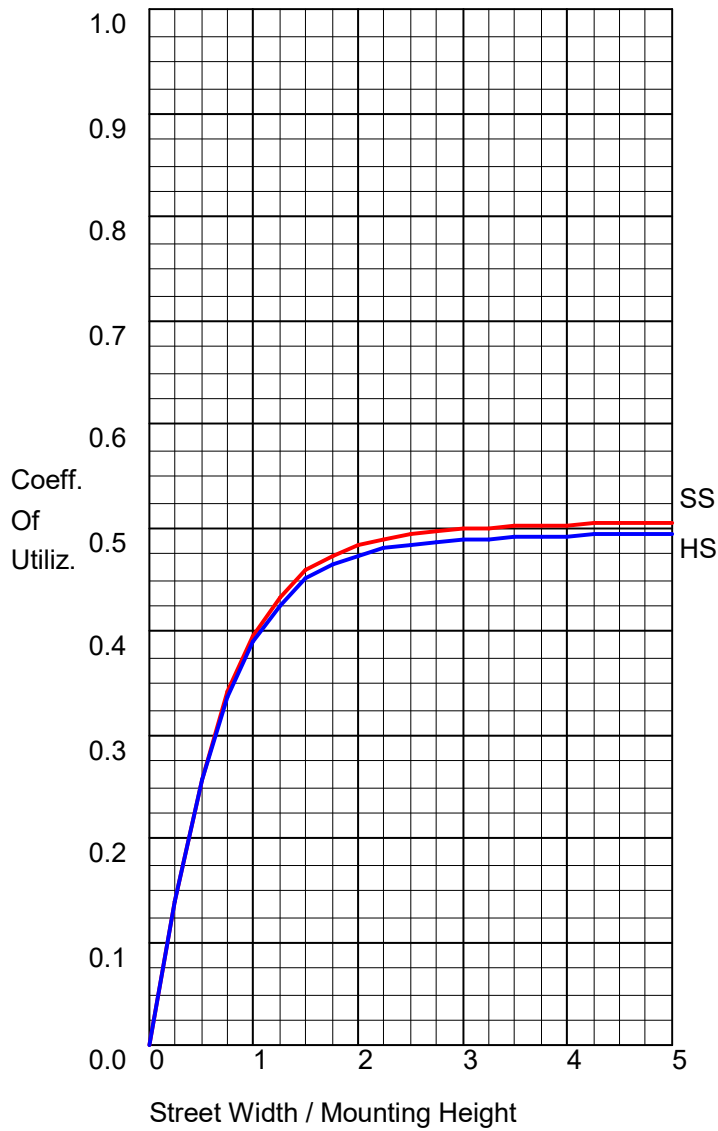


**FLUX DISTRIBUTION**

	Lumens	Percent Of Luminaire
Downward Street Side	5146.5	50.6
Downward House Side	5028.5	49.4
Downward Total	10175.0	100.0
Upward Street Side	0.5	0.0
Upward House Side	0.5	0.0
Upward Total	1.0	0.0
Total Flux	10176.0	100.0




POLAR GRAPH

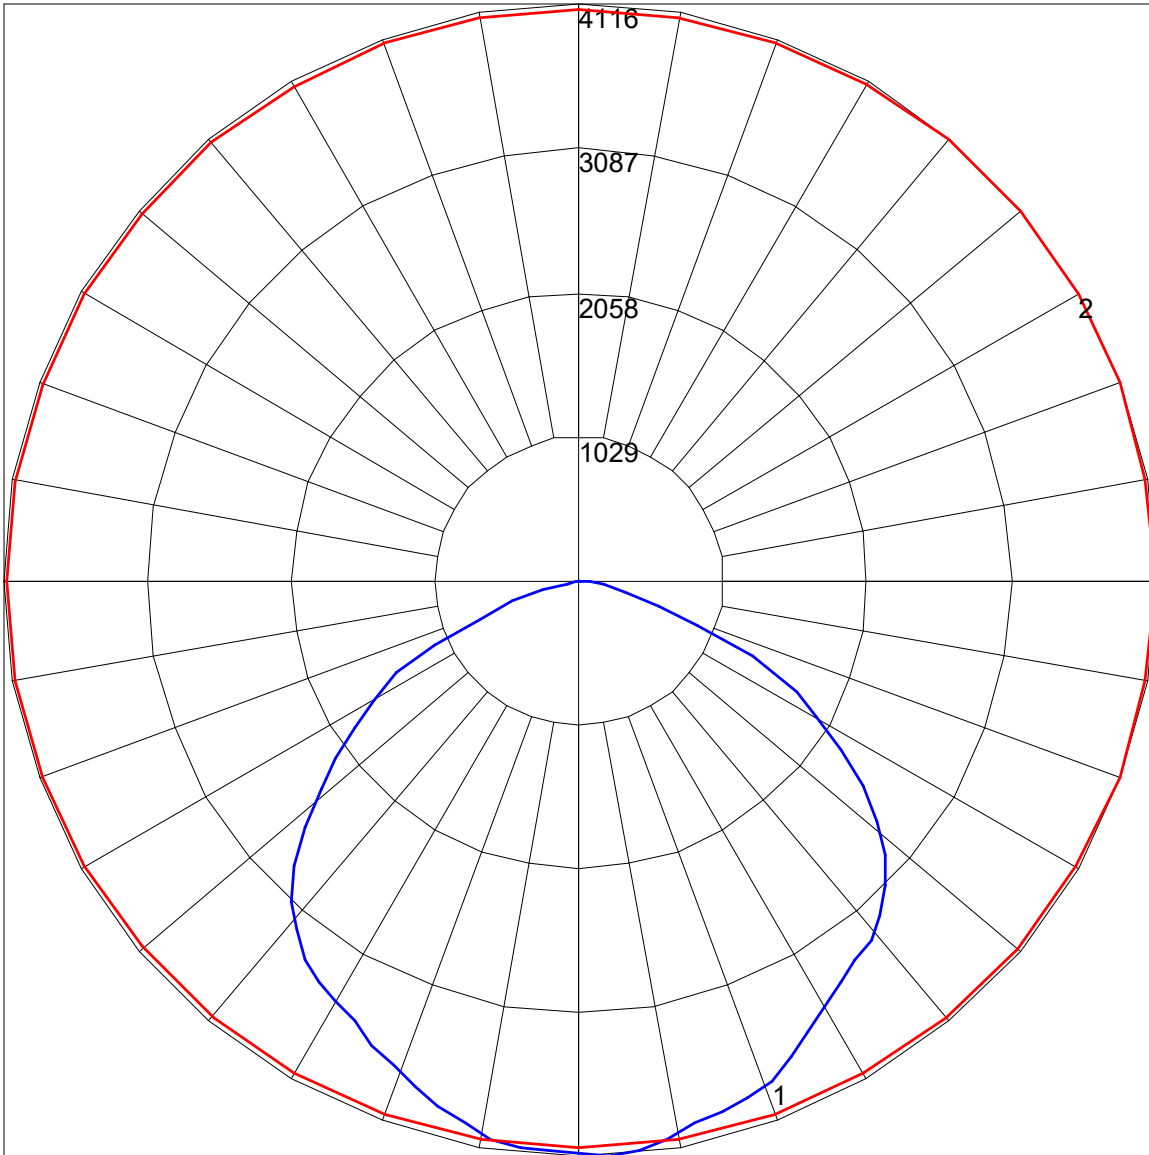


Maximum Candela = 4115.86 Located At Horizontal Angle = 20, Vertical Angle = 3  
# 1 - Vertical Plane Through Horizontal Angles (20 - 200) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (3) (Through Max. Cd.)

ISOFOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

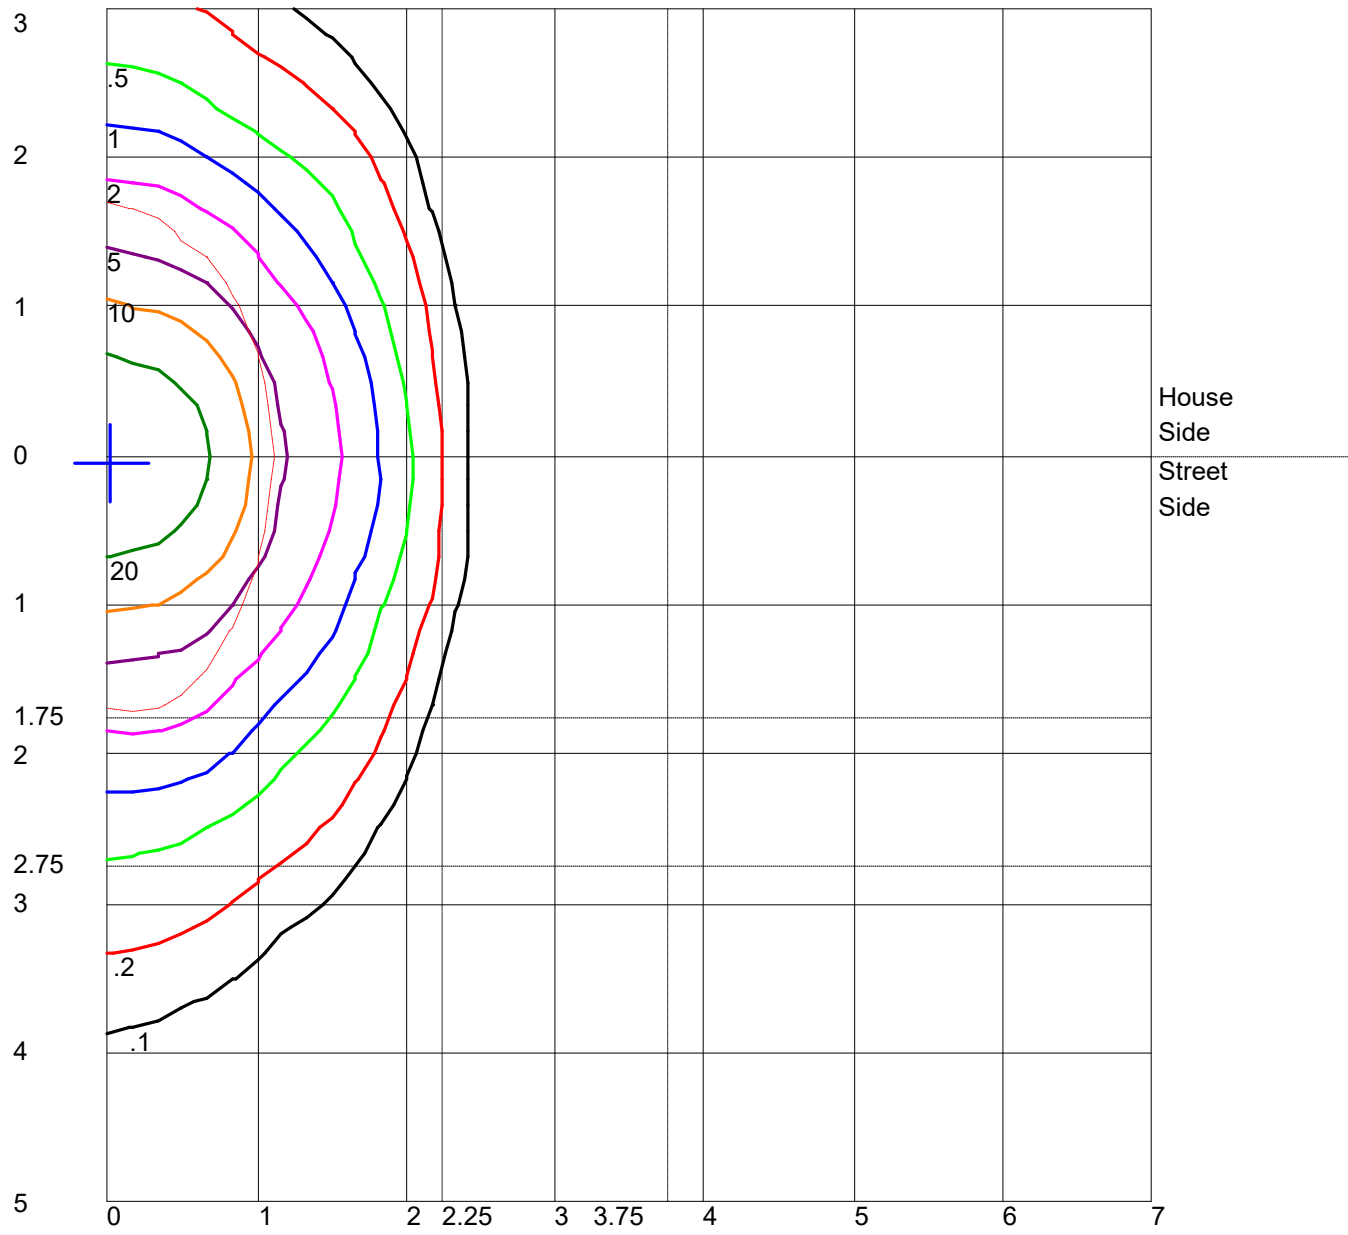

Distance In Units Of Mounting Height  
 Values Based On 10 Foot Mounting Height  
 1/2 Maximum Candela Trace Shown As Dashed Curve  
 (+) = Maximum Candela Point

LUMINAIRE CLASSIFICATION SYSTEM (LCS) GRAPH

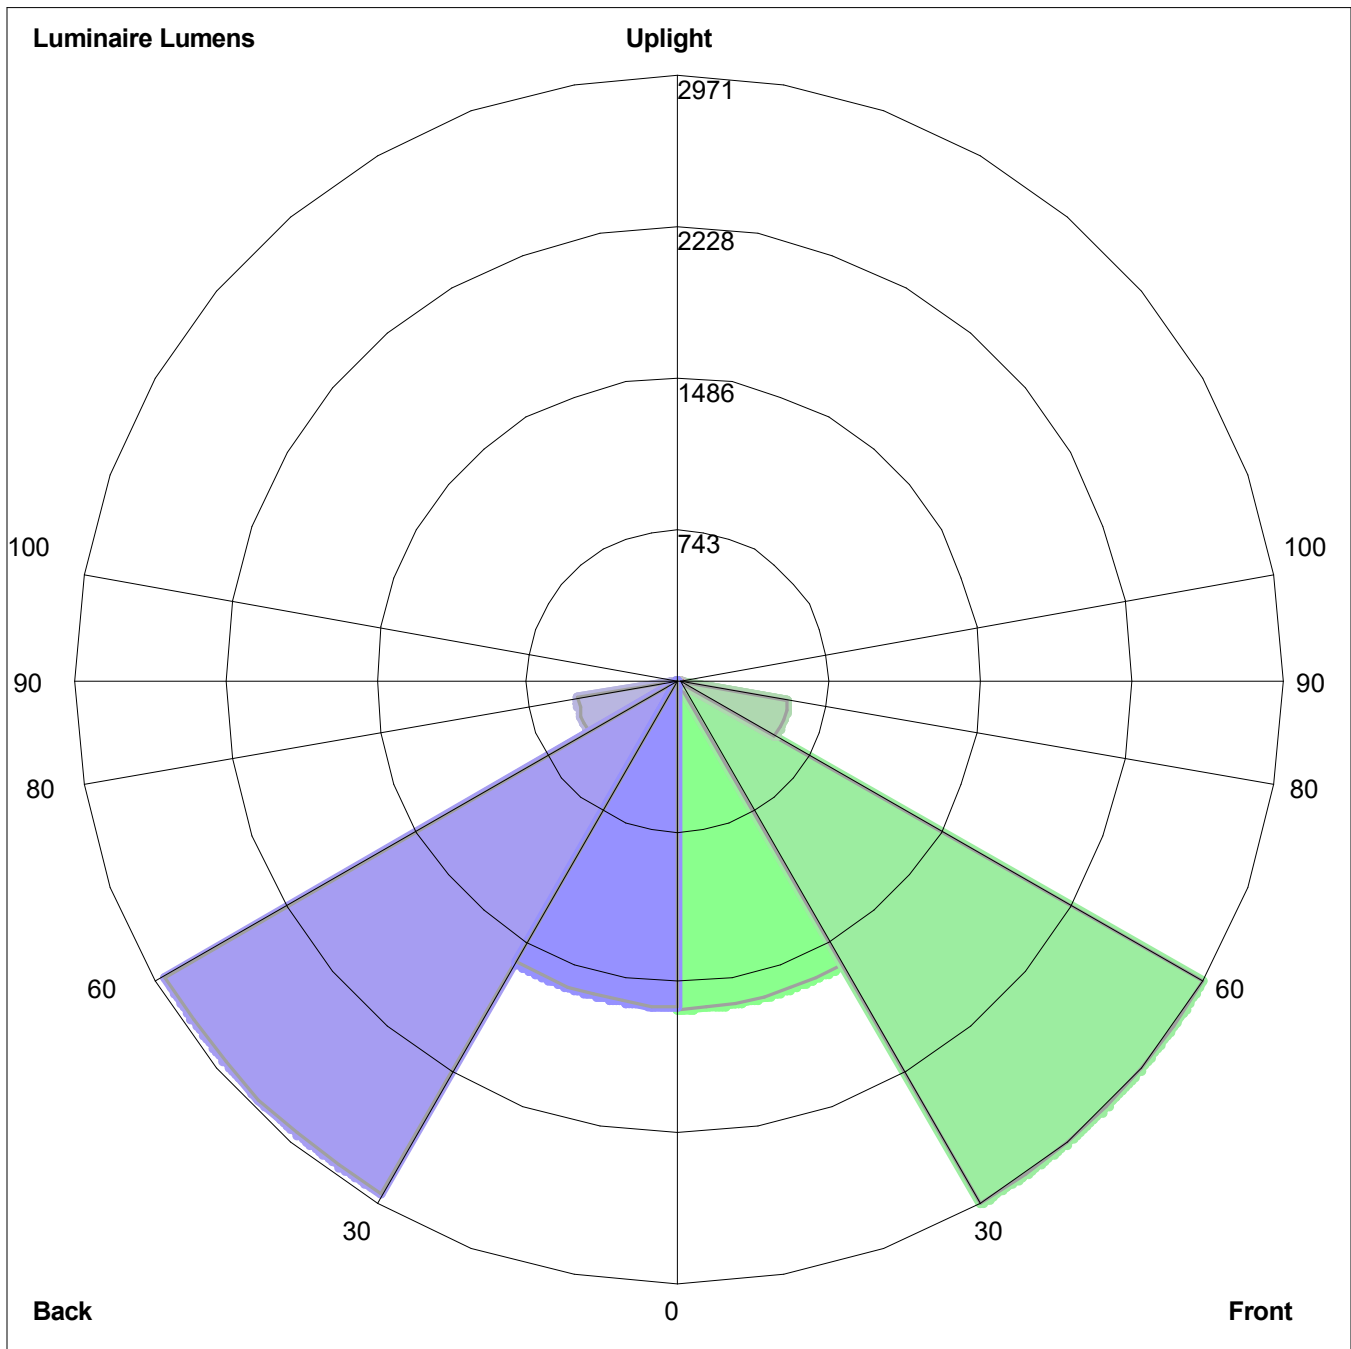

Luminaire Lumens:  
Front: Low=1615.6, Medium=2971.2, High=549.2, Very High=10.5  
Back: Low=1604.4, Medium=2912.9, High=504.8, Very High=6.4  
Uplight: Low=1.0, High=0.0

BUG Rating : B3-U1-G2